
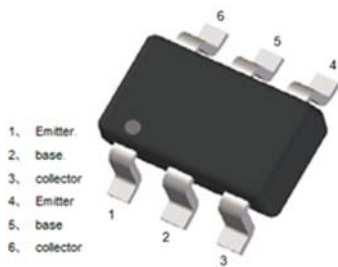


## Dual NPN+PNP Small Signal Transistor

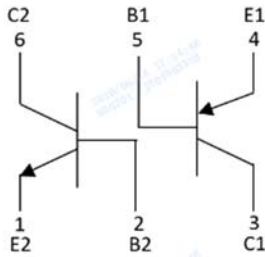

### Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic insertion

### Application

- Signal amplification
- Switching circuit

### Mechanical data

- **Package:** SOT-363S
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

### ■ Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

#### TR1 NPN Pin1、2、6

Item	Symbol	Unit	Conditions	Value
Device marking code				PJ
Collector-base voltage	$V_{CBO}$	V	$I_C = 10\mu\text{A}, I_E = 0$	80
Collector-emitter voltage	$V_{CEO}$	V	$I_C = 10\text{mA}, I_B = 0$	65
Emitter-base voltage	$V_{EBO}$	V	$I_E = 10\mu\text{A}, I_C = 0$	6
Collector current	$I_C$	mA		100
Power dissipation	$P_D$	mW		200
Operation junction temperature	$T_j$	$^\circ\text{C}$		-55 to +150
Storage temperature	$T_{STG}$	$^\circ\text{C}$		-55 to +150



# BC846BPNS

RoHS  
COMPLIANT

## TR2 PNP Pin3、4、5

Item	Symbol	Unit	Conditions	Value
Collector-base voltage	$V_{CB0}$	V	$I_C = -10\mu A, I_E = 0$	-80
Collector-emitter voltage	$V_{CE0}$	V	$I_C = -10mA, I_B = 0$	-65
Emitter-base voltage	$V_{EB0}$	V	$I_E = -10\mu A, I_C = 0$	-6
Collector current	$I_C$	mA		-100
Power dissipation	$P_D$	mW		200
Operation junction temperature	$T_j$	°C		-55 to +150
Storage temperature	$T_{STG}$	°C		-55 to +150

### ■ Electrical Characteristics ( $T_a = 25^\circ C$ Unless otherwise specified)

## TR1 NPN Pin1、2、6

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = 10\mu A, I_E = 0$	80		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = 10mA, I_B = 0$	65		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = 10\mu A, I_C = 0$	6		
Collector cut-off current	$I_{CBO}$	nA	$V_{CB} = 50V, I_B = 0$			15
Emitter-base cutoff current	$I_{EBO}$	nA	$V_{EB} = 5V, I_C = 0$			100
DC current gain	$h_{FE}$		$V_{CE} = 5V, I_C = 2mA$	200		450
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C = 10mA, I_B = 0.5mA$			0.1
	$V_{CE(sat)2}$	V	$I_C = 100mA, I_B = 5mA$			0.3
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C = 10mA, I_B = 0.5mA$			0.85
	$V_{BE(sat)2}$	V	$I_C = 100mA, I_B = 5mA$			1.1
Base-emitter voltage	$V_{BE1}$	V	$V_{CE} = 5V, I_C = 2mA$			0.7
	$V_{BE2}$	V	$V_{CE} = 5V, I_C = 10mA$			0.77
Transition frequency	$f_T$	MHz	$V_{CE} = 5V, I_C = 10mA, f = 100MHz$	100		



# BC846BPNS

RoHS  
COMPLIANT

## TR2 PNP Pin3、4、5

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = -10\mu A, I_E = 0$	-80		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = -10mA, I_B = 0$	-65		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = -10\mu A, I_C = 0$	-6		
Collector cut-off current	$I_{CBO}$	nA	$V_{CB} = -50V, I_B = 0$			-15
Emitter-base cutoff current	$I_{EBO}$	nA	$V_{EB} = -6V, I_C = 0$			-100
DC current gain	$h_{FE}$		$V_{CE} = -5V, I_C = -2mA$	200		450
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C = -10mA, I_B = -0.5mA$			-0.3
	$V_{CE(sat)2}$	V	$I_C = -100mA, I_B = -5mA$			-0.65
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C = -10mA, I_B = -0.5mA$			-0.85
	$V_{BE(sat)2}$	V	$I_C = -100mA, I_B = -5mA$			-1.1
Base-emitter voltage	$V_{BE1}$	V	$V_{CE} = -5V, I_C = -2mA$			-0.75
	$V_{BE2}$	V	$V_{CE} = -5V, I_C = -10mA$			-0.82
Transition frequency	$f_T$	MHZ	$V_{CE} = -5V, I_C = -10mA, f = 100MHz$	100		

### ■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(1)}$	$^{\circ}C/W$	625
Thermal resistance, junction-to-case	$R_{\theta J-C}^{(1)}$	$^{\circ}C/W$	500

#### Note:

(1) Device mounted on PCB, single-sided copper, with standard footprint



## ■ Characteristics

TR1 NPN Pin1、2、6

Fig 1: Static Characteristics

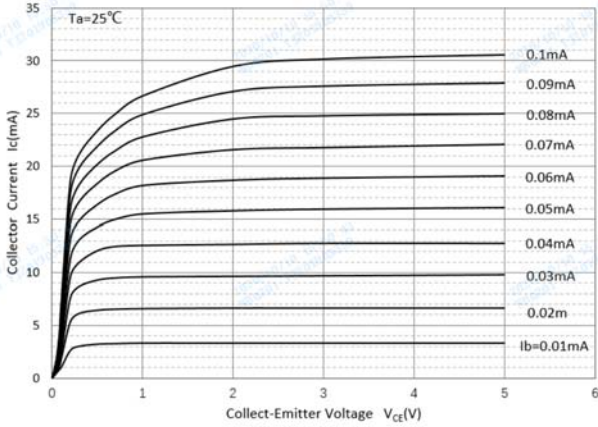


Fig 2: DC Current Gain Characteristics

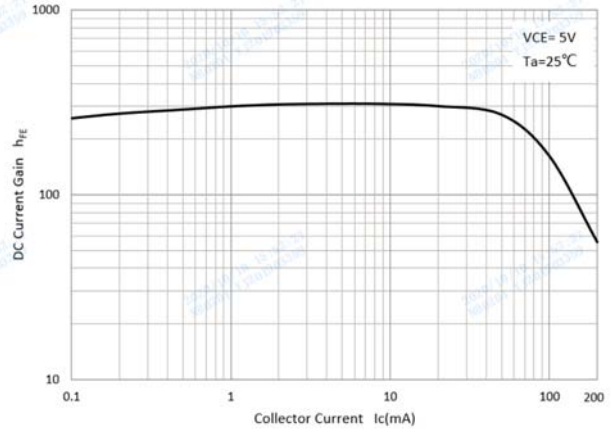


Fig 3: Collector-Emitter Saturation Voltage

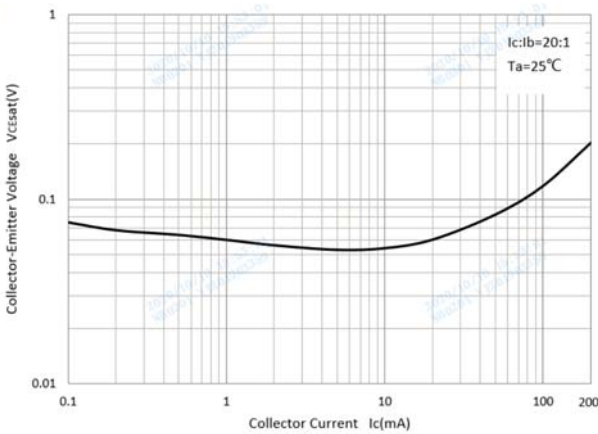


Fig 4: Base-Emitter Saturation Voltage

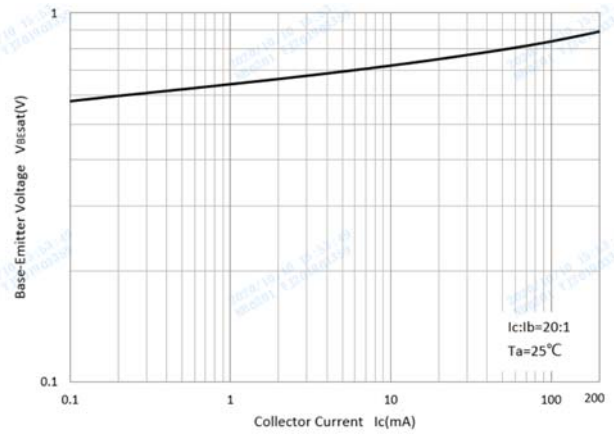


Fig 5: Base-emitter on voltage

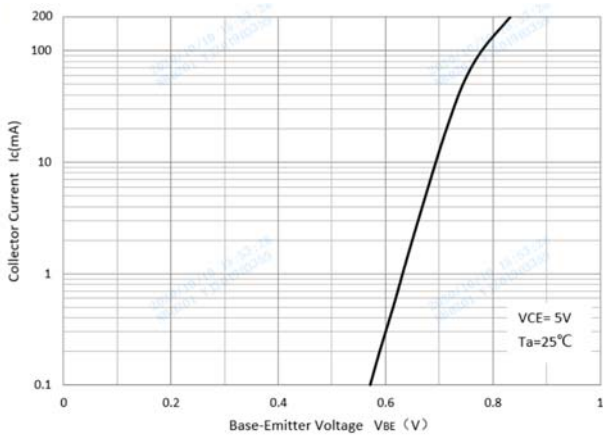


Fig 6: Cob/Cib-VCB/VEB


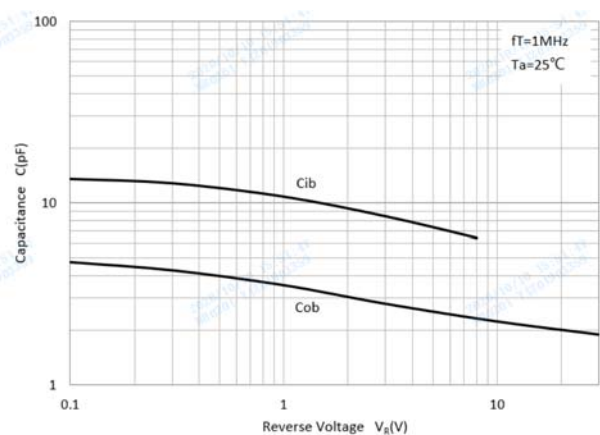




Fig 7: P<sub>D</sub>-T<sub>a</sub> Curve

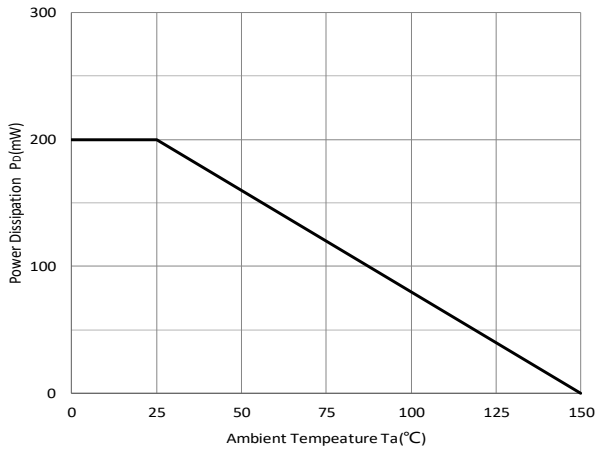

TR2 PNP Pin3、4、5

Fig 1: Static Characteristics

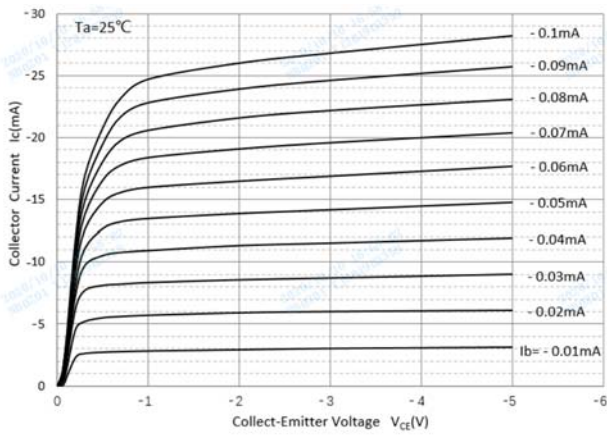


Fig 2: DC Current Gain Characteristics

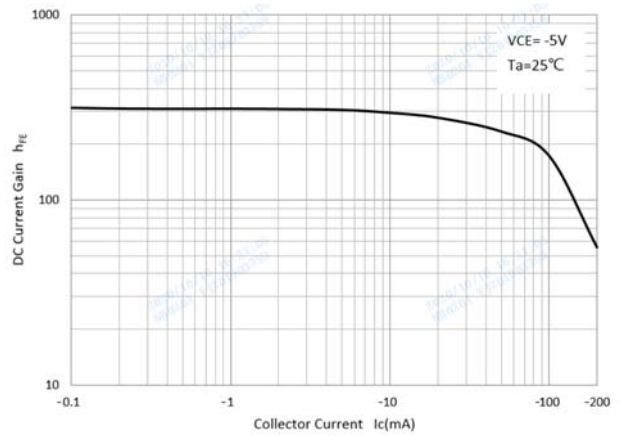


Fig 3: Collector-Emitter Saturation Voltage

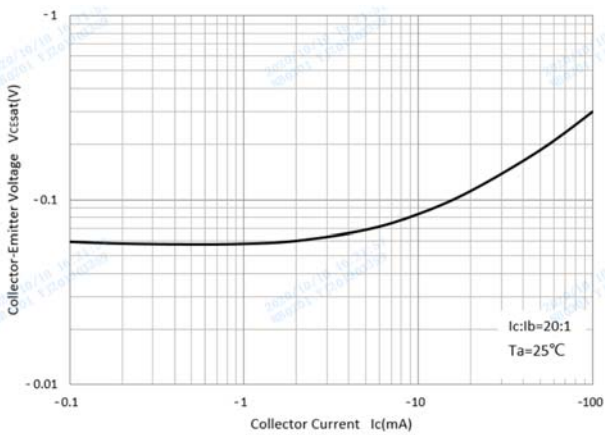


Fig 4: Base-Emitter Saturation Voltage


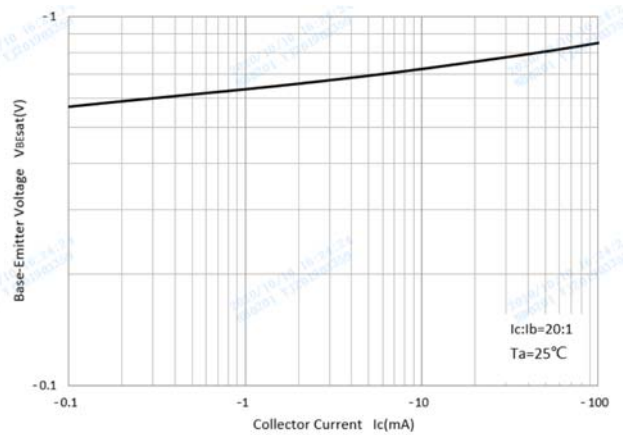




Fig 5: Base-emitter on voltage



Fig 6:  $C_{ob}/C_{ib}-V_{CB}/V_{EB}$

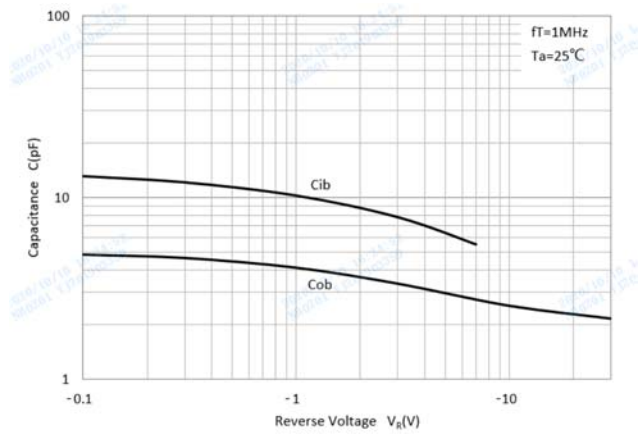




# BC846BPNS

RoHS  
COMPLIANT

## Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BC846BPNS	F2	Approximate 0.009	3000	30000	120000	7" reel
BC846BPNS	F3	Approximate 0.009	10000	/	210000	7" reel

## Outline Dimensions

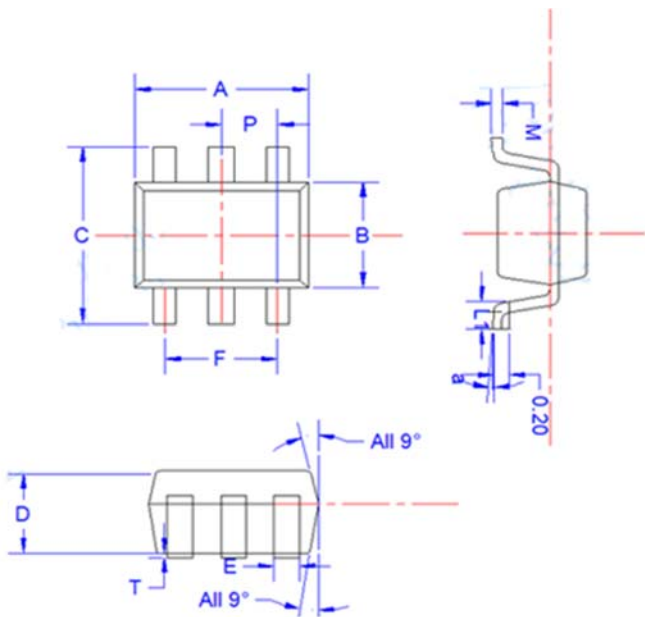

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
E	0.15	0.25	0.35
B	1.15	1.25	1.35
C	2.00	2.10	2.20
P	0.650BSC		
A	1.80	2.00	2.20
T	0.00	0.05	0.100
D	0.90	0.95	1.00
L1	0.20	0.30	0.40
$\alpha$	4°±4°		
M	0.10	0.15	0.25

## Suggested Pad Layout

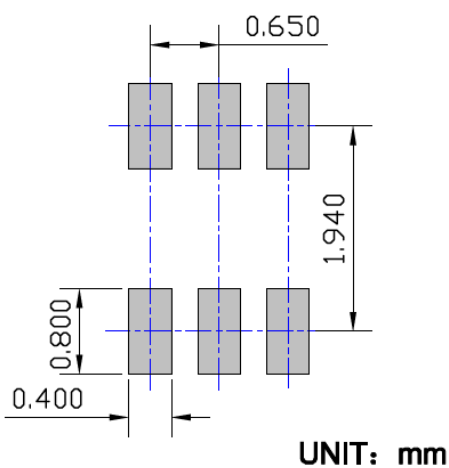



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.