


## Dual NPN Small Signal Transistor

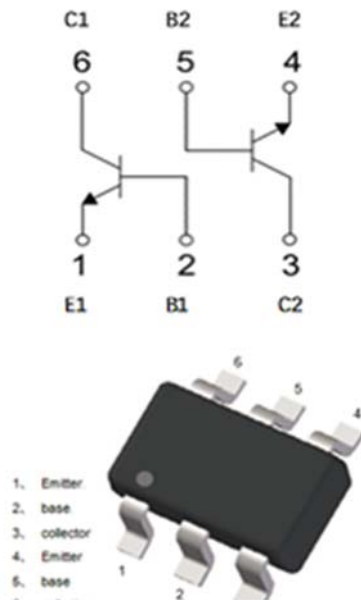

### Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic insertion

### Application

- Signal amplification
- Switching circuit

### Mechanical data

- **Package:** SOT-363S
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102CC

### ■ Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Device marking code				K4N
Collector-base voltage	$V_{CB0}$	V	$I_C = 100\mu\text{A}, I_E = 0$	180
Collector-emitter voltage	$V_{CE0}$	V	$I_C = 1\text{mA}, I_B = 0$	160
Emitter-base voltage	$V_{EB0}$	V	$I_E = 10\mu\text{A}, I_C = 0$	6
Collector current	$I_C$	mA		600
Power dissipation	$P_D$	mW		200
Operation junction temperature	$T_J$	$^\circ\text{C}$		-55 to +150
Storage temperature	$T_{STG}$	$^\circ\text{C}$		-55 to +150



# MMDT5551S

RoHS  
COMPLIANT

## ■ Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	V	I <sub>C</sub> =100μA, I <sub>E</sub> =0	180		
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	V	I <sub>C</sub> =1mA, I <sub>B</sub> =0	160		
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	V	I <sub>E</sub> =10μA, I <sub>C</sub> =0	6		
Collector-base cut-off current	I <sub>CBO</sub>	nA	V <sub>CB</sub> =120V, I <sub>E</sub> =0			50
Emitter-base cut-off current	I <sub>EBO</sub>	nA	V <sub>BE</sub> =4V, I <sub>C</sub> =0			50
DC current gain	h <sub>FE1</sub>		V <sub>CE</sub> =5V, I <sub>C</sub> =1mA	80		
	h <sub>FE2</sub>		V <sub>CE</sub> =5V, I <sub>C</sub> =10mA	100		300
	h <sub>FE3</sub>		V <sub>CE</sub> =5V, I <sub>C</sub> =50mA	50		
Collector-emitter saturation voltage	V <sub>CE(sat)1</sub>	V	I <sub>C</sub> =10mA, I <sub>B</sub> =1mA			0.15
	V <sub>CE(sat)2</sub>	V	I <sub>C</sub> =50mA, I <sub>B</sub> =5mA			0.2
Base-emitter saturation voltage	V <sub>BE(sat)1</sub>	V	I <sub>C</sub> =10mA, I <sub>B</sub> =1mA			1
	V <sub>BE(sat)2</sub>	V	I <sub>C</sub> =50mA, I <sub>B</sub> =5mA			1
Transition frequency	f <sub>T</sub>	MHz	V <sub>CE</sub> =10V, I <sub>C</sub> =20mA, f=100MHz	100		300
Output capacitance	C <sub>ob</sub>	pF	V <sub>CE</sub> =10V, I <sub>E</sub> =0, f=1MHz			6
Noise figure	N <sub>F</sub>	pF	V <sub>CE</sub> =5V, I <sub>C</sub> =0.2mA, f=1kHz, R <sub>S</sub> =1KΩ			8

## ■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R <sub>θJ-A</sub> <sup>(1)</sup>	°C/W	625
Thermal resistance, junction-to-case	R <sub>θJ-C</sub> <sup>(1)</sup>	°C/W	500

### Note:

(1) Device mounted on PCB, single-sided copper, with standard footprint



## ■ Characteristics

TR1 NPN Pin1、2、6

Fig 1: Static Characteristics

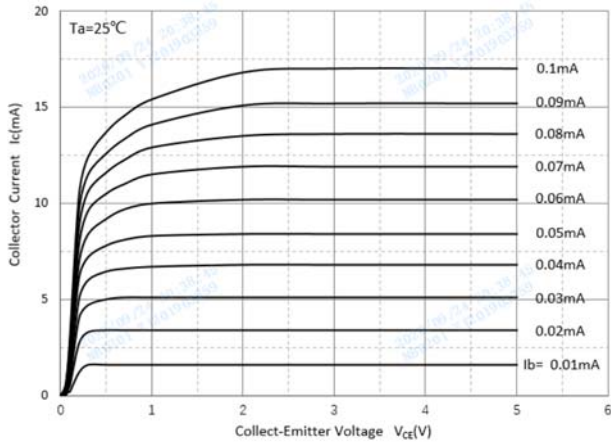


Fig 2: Dc Current Gain

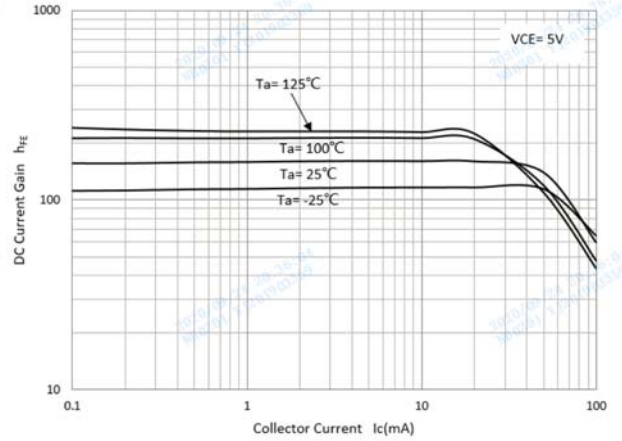


Fig 3: Collector-Emittor Saturation Voltage

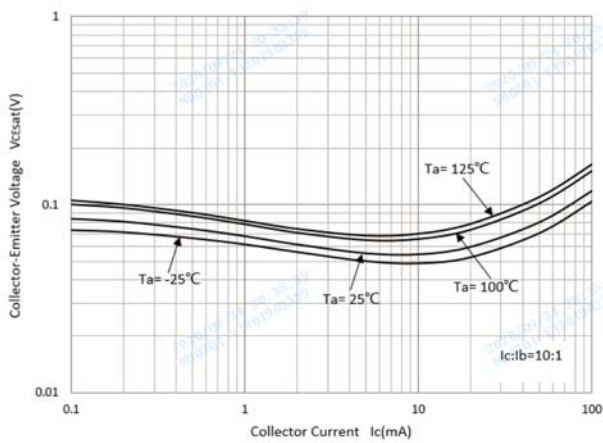


Fig 4: Base-Emittor Saturation Voltage

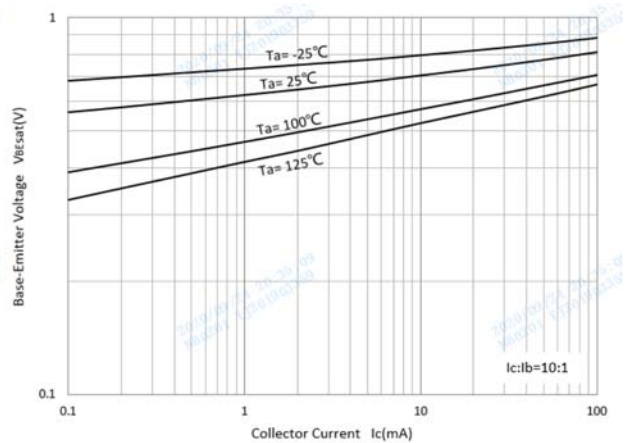


Fig 5: Base-Emittor Voltage


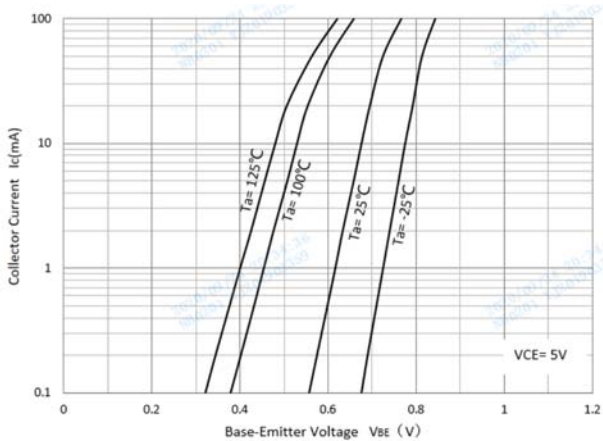


Fig 6: Cob/Cib-Vcb/Veb




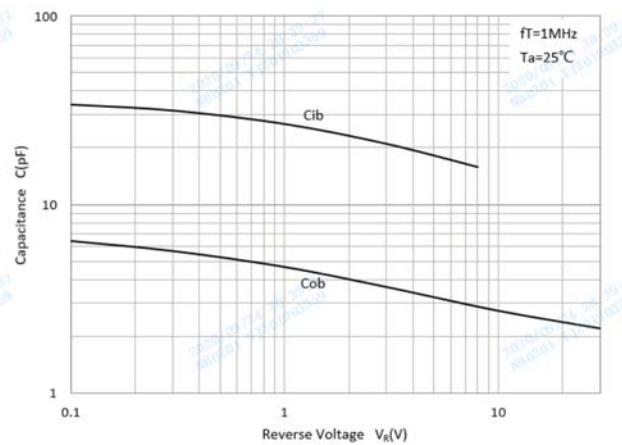

# MMDT5551S

RoHS  
COMPLIANT

Fig 7:  $P_D$ - $T_a$  Curve

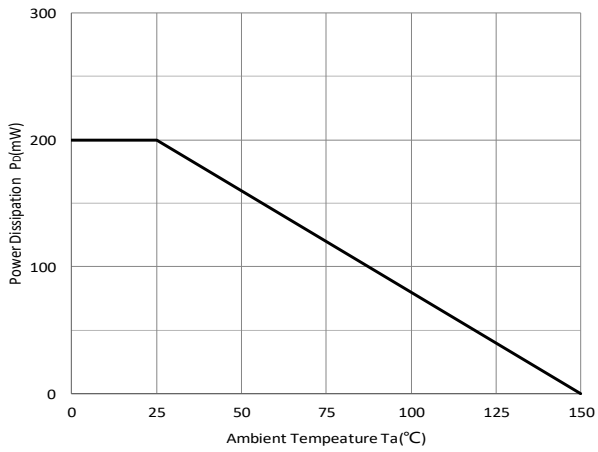




# MMDT5551S

RoHS  
COMPLIANT

## ■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
MMDT5551S	F2	Approximate 0.009	3000	30000	120000	7" reel
MMDT5551S	F3	Approximate 0.009	10000	/	210000	7" reel

## ■ Outline Dimensions

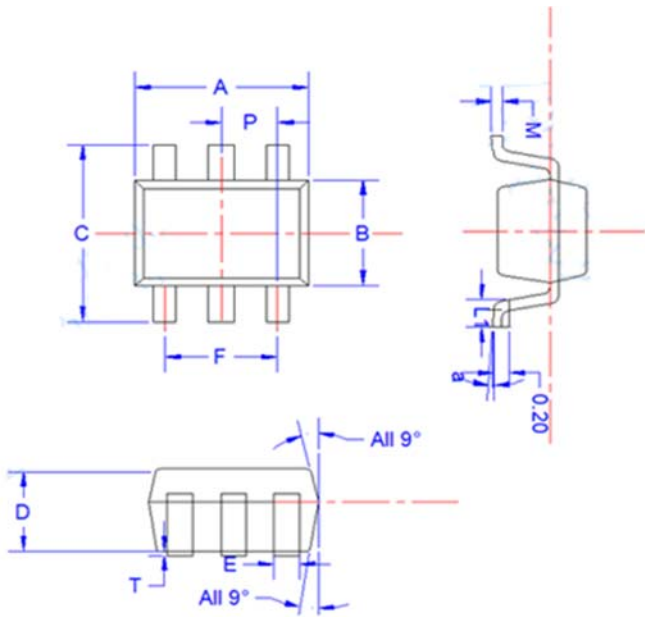

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
E	0.15	0.25	0.35
B	1.15	1.25	1.35
C	2.00	2.10	2.20
P	0.650BSC		
A	1.80	2.00	2.20
T	0.00	0.05	0.100
D	0.90	0.95	1.00
L1	0.20	0.30	0.40
a	4°±4°		
M	0.10	0.15	0.25

## ■ Suggested Pad Layout

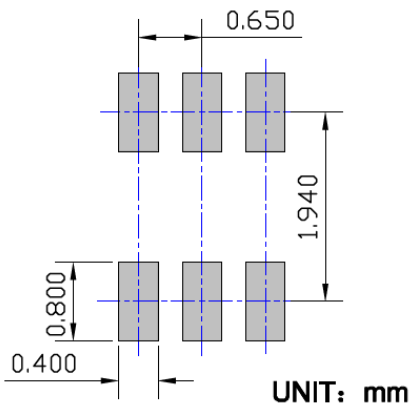



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.