




GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All Diffused Structure
- . High Surge rating
- . Blocking capability up to 4500 volts
- . Ceramic Housing Hermetic Package
- . Pressure Assembled Device

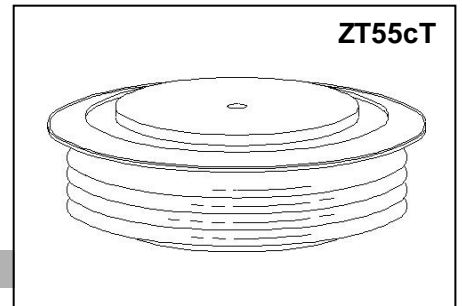

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

| Device Type | V _{RRM} (1) | V _{RSM} (1) |
|-------------|----------------------|----------------------|
| ZP1200-36 | 3600 | 3800 |
| ZP1200-38 | 3800 | 4000 |
| ZP1200-40 | 4000 | 4200 |
| ZP1200-42 | 4200 | 4400 |
| ZP1200-45 | 4500 | 4700 |

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

| | | |
|---------------------------------|------------------|-------------------|
| Repetitive peak reverse leakage | I _{RRM} | 5 mA 60 mA (3) |
|---------------------------------|------------------|-------------------|

Notes:


All ratings are specified for T_j=25 °C unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60zHz sinusoidal waveform over the temperature range 0 to +150 °C.

(2) 10 msec. max. pulse width

(3) Maximum value for T_j = 150 °C.

(4) See parameter definition below:

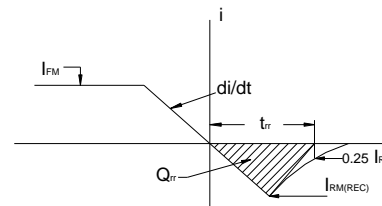

REVERSE RECOVERY CHARACTERIST

Conducting - on state

| Parameter | Symbol | Min. | Max. | Typ. | Units | Conditions |
|---|----------------------|------|-----------------------|------|------------------|---|
| Average forward current | I _{F(AV)} | | 1200 | | A | Sinewave, 180°, T _c =100°C |
| RMS forward current | I _{FRMS} | | 1884 | | A | Nominal value |
| Peak one cycle surge (non repetitive) current | I _{FSM} | | 18000 | | A | 10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T _j = 150 °C |
| I square t | I ² t | | 1.6 × 10 ⁶ | | A ² s | 10 msec |
| Peak forward voltage | V _{FM} | | 2.0 | | V | I _{FM} = 3000A;T _j =25°C |
| Threshold voltage | V _{FO} | | 0.96 | | V | T _j =150°C,I=0.5 π I _{F(AV)} to 1.5 π I _{F(AV)} |
| Slope resistance | r _F | | 0.29 | | mΩ | T _j =150°C,I=0.5 π I _{F(AV)} to 1.5 π I _{F(AV)} |
| Reverse Recovery Current (4) | I _{RM(REC)} | | | | A | I _{FM} = 500 A; di/dt = -10 A/s;T _{jmax} |
| Reverse Recovery Charge (4) | Q _{rr} | | | 4500 | μC | I _{FM} = 500 A; di/dt = -10 A/s;T _{jmax} |
| Reverse Recovery Time (4) | t _{rr} | | | | μs | I _{FM} = 500 A; di/dt = -10 A/s;T _{jmax} |

| Parameter | Symbol | Min. | Max. | Typ. | Units | Conditions |
|---------------------------------------|-------------------|------|-------|------|-------|---------------------|
| Operating temperature | T_j | -40 | +150 | | °C | |
| Storage temperature | T_{stg} | -40 | +150 | | °C | |
| Thermal resistance - junction to case | $R_{\Theta(j-c)}$ | | 0.022 | | °C/W | Double sided cooled |
| Thermal resistance - case to heatsink | $R_{\Theta(c-s)}$ | | 0.005 | | °C/W | Double sided cooled |
| Mounting force | P | 22 | 27 | 25 | kN | |
| Weight | W | | | 0.46 | kg. | |

* Mounting surfaces smooth, flat and greaseless

CASE OUTLINE AND DIMENSIONS

