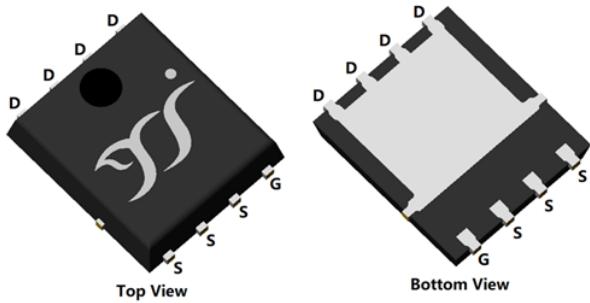



## P-Channel Enhancement Mode Field Effect Transistor


**PDFN5060-8L**


### Product Summary

- $V_{DS}$  -40V
- $I_D$  -57A
- $R_{DS(ON)}$  (at  $V_{GS}=-10V$ )  $<12m\Omega$
- $R_{DS(ON)}$  (at  $V_{GS}=-4.5V$ )  $<24m\Omega$
- 100% EAS Tested
- 100%  $\nabla V_{DS}$  Tested

### General Description

- Excellent package for heat dissipation
- High density cell design for low  $R_{DS(ON)}$
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

### Applications

- Load Switch
- DC-DC convertor

### ■ Limiting Values

Parameter	Conditions		Symbol	Min	Max	Unit
Drain-source Voltage			$V_{DS}$	-	-40	V
Gate-source Voltage			$V_{GS}$	-20	20	
Continuous Drain Current (Note 1,2)	Steady-State	$T_A=25^\circ C, V_{GS}=-10V$	$I_D$	-	-10.6	A
		$T_A=100^\circ C, V_{GS}=-10V$		-	-6.7	
Continuous Drain Current (Note 1,3)		$T_C=25^\circ C, V_{GS}=-10V$ , Chip limitation		-	-57	
		$T_C=100^\circ C, V_{GS}=-10V$		-	-36	
Pulsed Drain Current	$T_C=25^\circ C, t_p \leq 10\mu s$		$I_{DM}$	-	-220	mA
Maximum Body-Diode Continuous Current	$T_C=25^\circ C$		$I_S$		-55	
Avalanche energy (non-repetitive)	$T_J=25^\circ C, V_G=-10V, R_G=25\Omega, L=0.5mH, I_{AS}=-23A$		EAS	-	132.25	
Total Power Dissipation (Note 1,2)	Steady-State	$T_A=25^\circ C$	$P_D$	-	2.3	W
		$T_A=100^\circ C$		-	0.9	
Total Power Dissipation (Note 1,3)		$T_C=25^\circ C$		-	66	
Junction and Storage Temperature Range		$T_C=100^\circ C$		-	26	
Junction and Storage Temperature Range			$T_J, T_{STG}$	-55	150	°C

### ■ Thermal Resistance

Parameter	Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient (Note 3)	$R_{\theta JA}$	-	55	°C/W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	-	1.9	

### ■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJG012P04A	F1	YJG012P04A	5000	10000	100000	13" reel



# YJG012P04A

## ■ Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
<b>Static Parameter</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=-250\mu A, T_j=25^\circ C$	-40	-	-	V
		$V_{GS}=0V, I_D=-1mA, T_j=25^\circ C$	-40	-	-	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=-40V, V_{GS}=0V, T_j=25^\circ C$	-	-	-1	$\mu A$
		$V_{DS}=-40V, V_{GS}=0V, T_j=150^\circ C$	-	-	-100	
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS}=\pm 20V, V_{DS}=0V, T_j=25^\circ C$	-	-	$\pm 100$	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A, T_j=25^\circ C$	-1.2	-1.7	-2.2	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-20A, T_j=25^\circ C$	-	9.7	12	$m\Omega$
		$V_{GS}=-4.5V, I_D=-20A, T_j=25^\circ C$	-	17	24	$m\Omega$
Diode Forward Voltage	$V_{SD}$	$I_S=-20A, V_{GS}=0V, T_j=25^\circ C$	-	-0.88	-1.2	V
Gate Resistance	$R_G$	$f=1MHz, T_j=25^\circ C$	-	5.9	-	$\Omega$
<b>Dynamic Parameters</b>						
Input Capacitance	$C_{iss}$	$V_{DS}=-20V, V_{GS}=0V, f=1MHz, T_j=25^\circ C$	-	2604	-	$pF$
Output Capacitance	$C_{oss}$		-	265	-	
Reverse Transfer Capacitance	$C_{rss}$		-	243	-	
<b>Switching Parameters</b>						
Total Gate Charge	$Q_g$	$V_{GS}=-10V, V_{DS}=-20V, I_D=-20A, T_j=25^\circ C$	-	55.8	-	$nC$
Gate-Source Charge	$Q_{gs}$		-	10.6	-	
Gate-Drain Charge	$Q_{gd}$		-	10.3	-	
Reverse Recovery Charge	$Q_{rr}$	$I_F=-20A, di/dt=100A/\mu s, V_{GS}=0V, V_R=-20V, T_j=25^\circ C$	-	26.3	-	$nC$
Reverse Recovery Time	$t_{rr}$		-	26	-	ns
Turn-on Delay Time	$t_{D(on)}$	$V_{GS}=-10V, V_{DS}=-20V, I_D=-20A, R_{GEN}=3\Omega, T_j=25^\circ C$	-	11	-	ns
Turn-on Rise Time	$t_r$		-	38	-	
Turn-off Delay Time	$t_{D(off)}$		-	73	-	
Turn-off Fall Time	$t_f$		-	48	-	

Note:

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- The value of  $R_{thJA}$  is measured with the device mounted on the 40mm\*40mm\*1.1mm single layer FR-4 PCB board with 1 in<sup>2</sup> pad of 2oz. Copper, in the still air environment with  $T_A=25^\circ C$ . The maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.
- Thermal resistance from junction to soldering point (on the exposed drain pad).

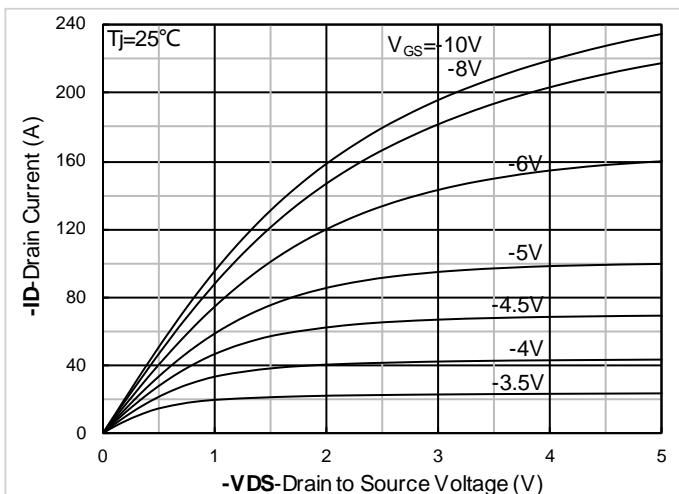
**■Typical Electrical and Thermal Characteristics Diagrams**

Figure 1. Output Characteristics; typical values

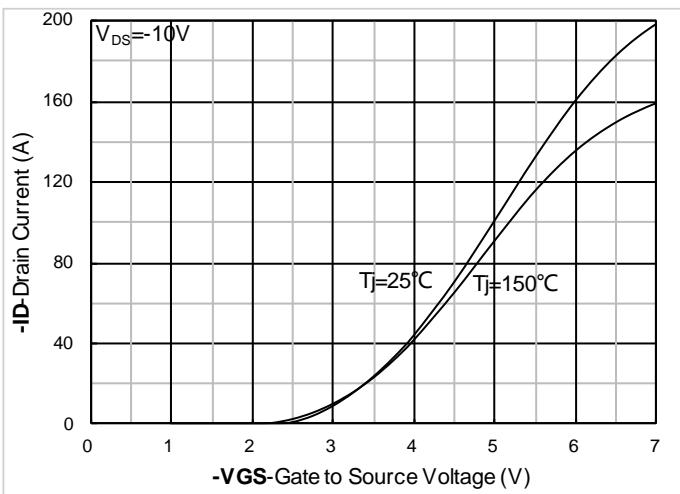


Figure 2. Transfer Characteristics; typical values

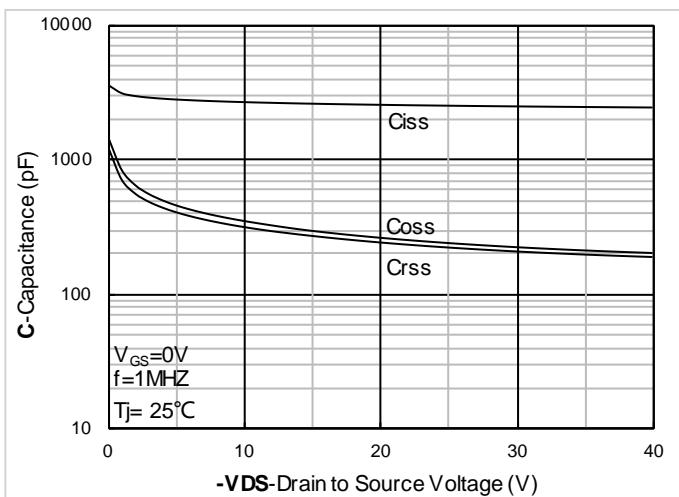


Figure 3. Capacitance Characteristics; typical values

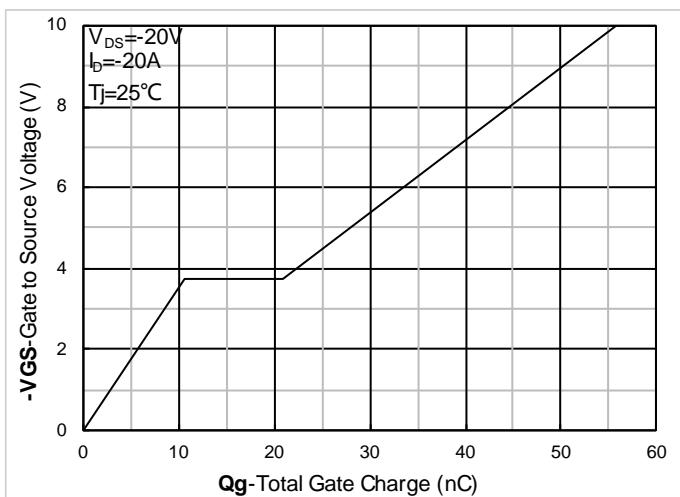


Figure 4. Gate Charge; typical values

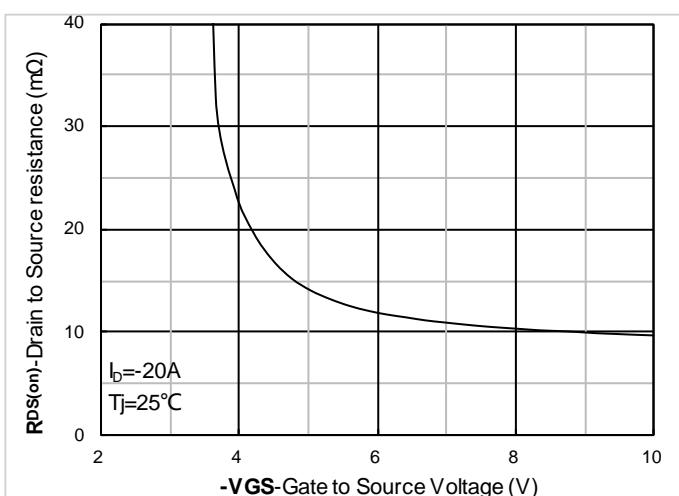


Figure 5. On-Resistance vs. Gate to Source Voltage; typical values

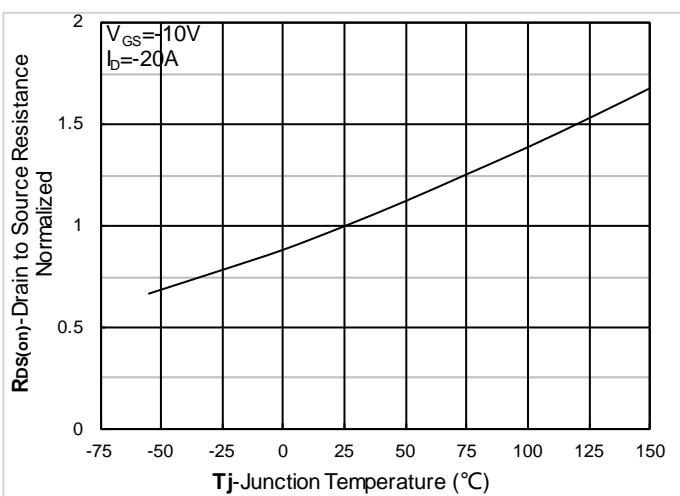


Figure 6. Normalized On-Resistance

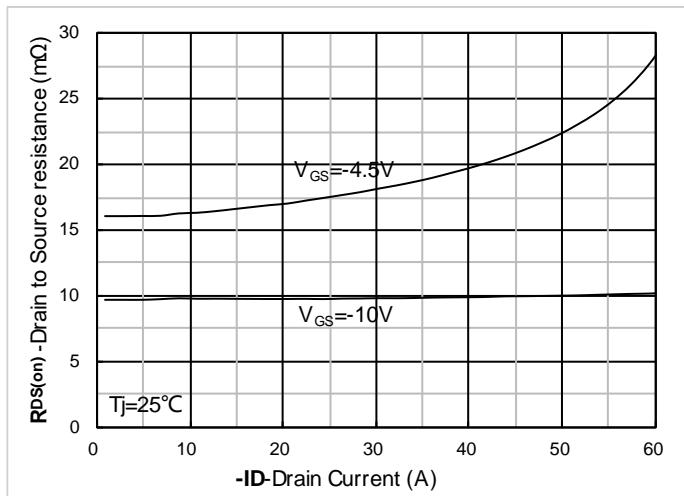
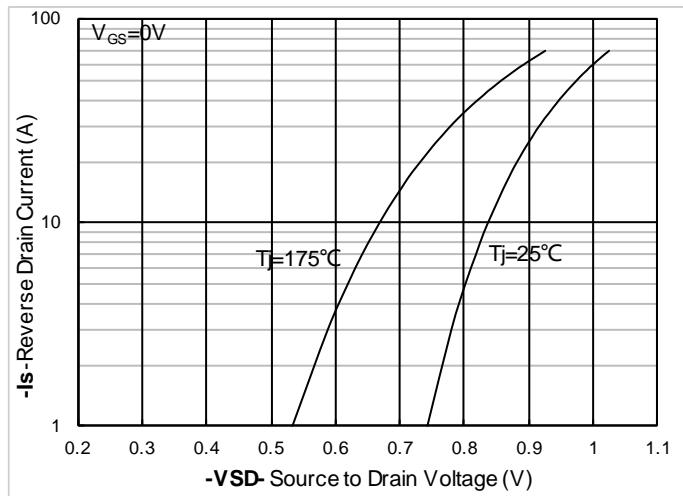
Figure 7.  $R_{DS(on)}$  vs. Drain Current; typical values

Figure 8. Forward characteristics of reverse diode; typical values

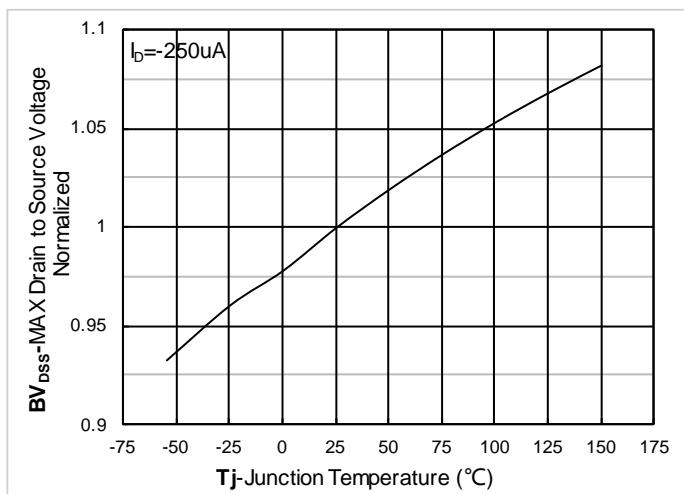


Figure 9. Normalized breakdown voltage

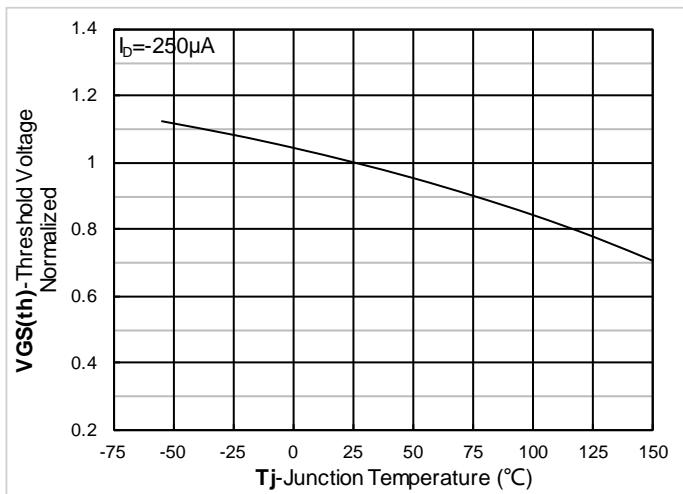


Figure 10. Normalized Threshold voltage

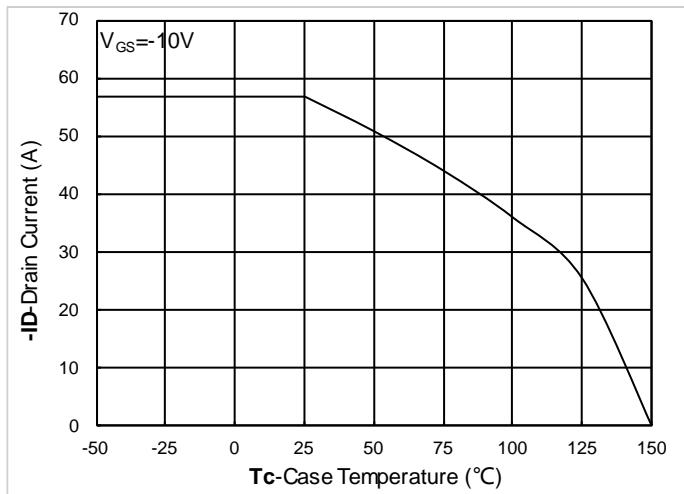


Figure 11. Current dissipation

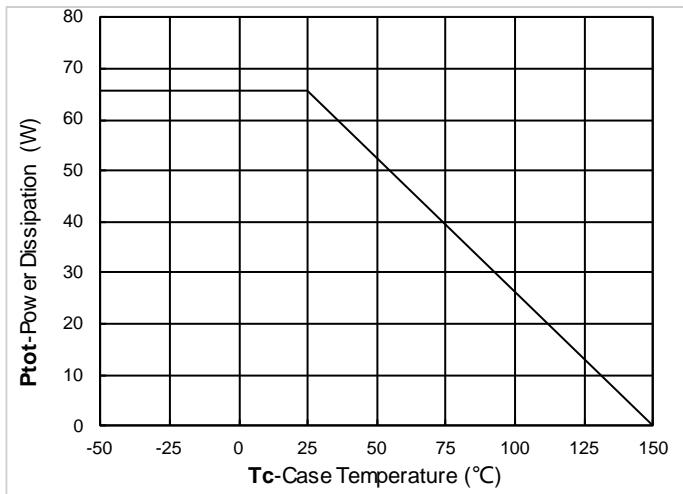


Figure 12. Power dissipation

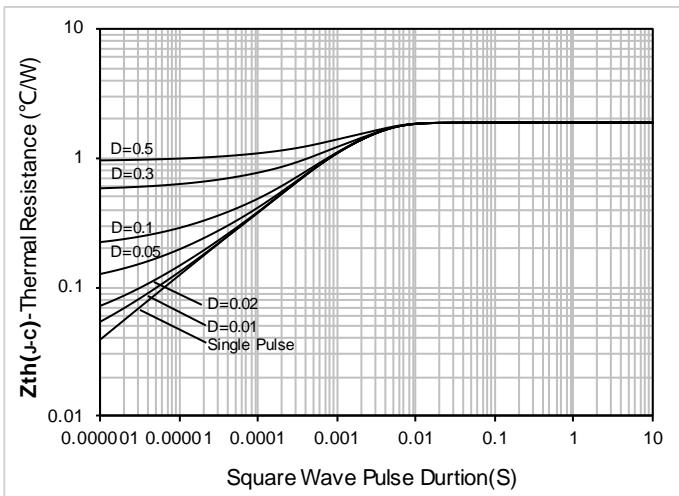


Figure 13. Maximum Transient Thermal Impedance





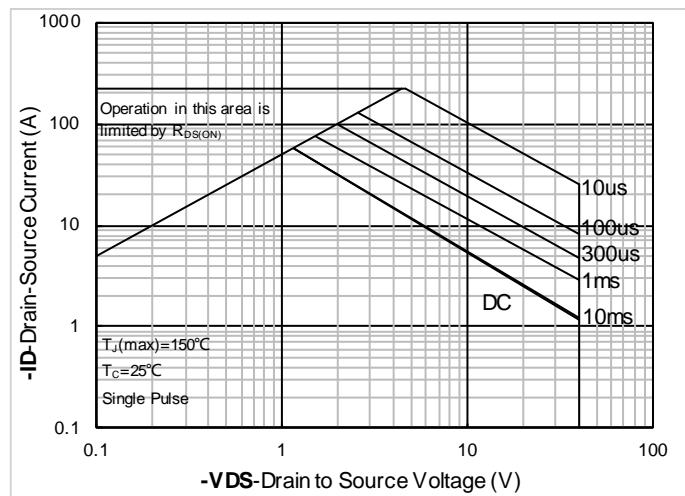


Figure 14. Safe Operation Area

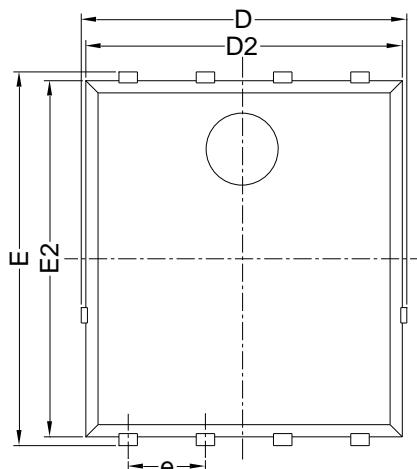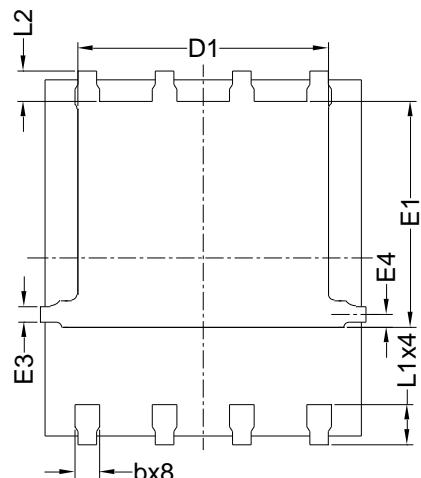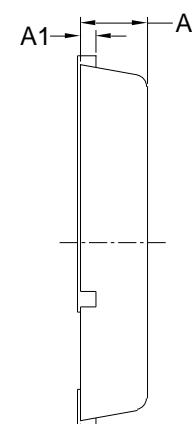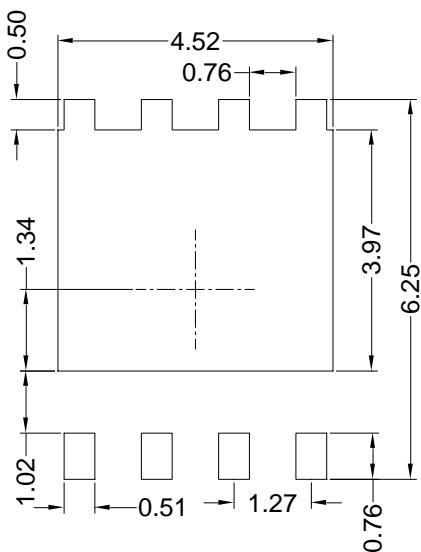


## ■ PDFN5060-8L-B-1.1MM Package information

Top View  
正面视图Bottom View  
背面视图Side View  
侧面视图Suggested Solder Pad Layout  
Top View

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	5.15	5.35	5.55
E	5.95	6.15	6.35
A	1.00	1.10	1.20
A1	0.254 BSC		
A2			0.10
D1	3.92	4.12	4.32
E1	3.52	3.72	3.92
D2	5.00	5.20	5.40
E2	5.66	5.86	6.06
E3	0.254 REF		
E4	0.21 REF		
L1	0.56	0.66	0.76
L2	0.50 BSC		
b	0.31	0.41	0.51
e	1.27 BSC		

## Note:

1. Controlling dimension:in millimeters.
2. General tolerance: $\pm 0.10\text{mm}$ .
3. The pad layout is for reference purposes only.

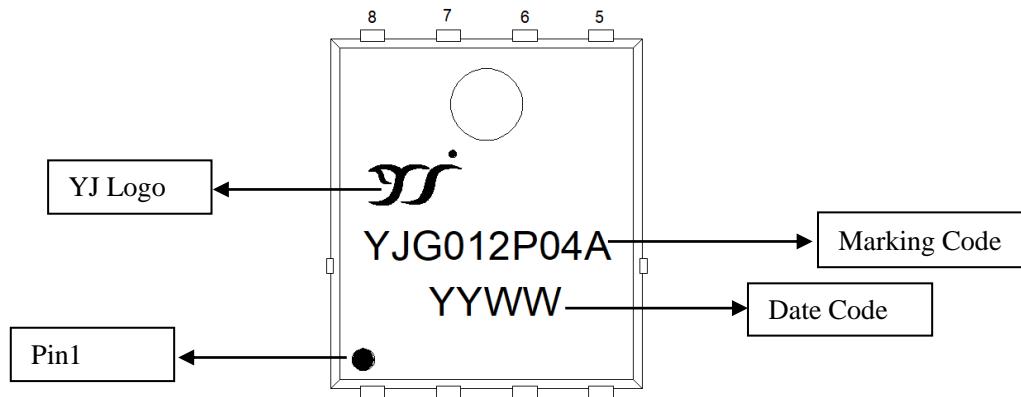**■ Marking Information****Note:**

1. All marking is at middle of the product body
2. All marking is in laser printing
3. YJG012P04A is Marking Code, YYWW is date code, "YY" is year, "WW" is week
4. Body color: Black



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use or sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.